STORM WATER DETENTION

1000 GALLON CONCRETE PRIMARY SEDIMENT BOX

TYPICAL STORM DRAIN WITH INTERNAL CATCH BASIN FOR HEAVY SOLIDS

INLET TO SECONDARY SAND & OIL INTERCEPTOR TANK COMPARTMENT

ENGINEERED DISCHARGE RATE BY PUMP OR GRAVITY FLOW

NATURAL DRAINAGE SWALE

12 FT. DIA, 50,000 GALLON FIBERGLASS STORAGE TANKS AS REQUIRED

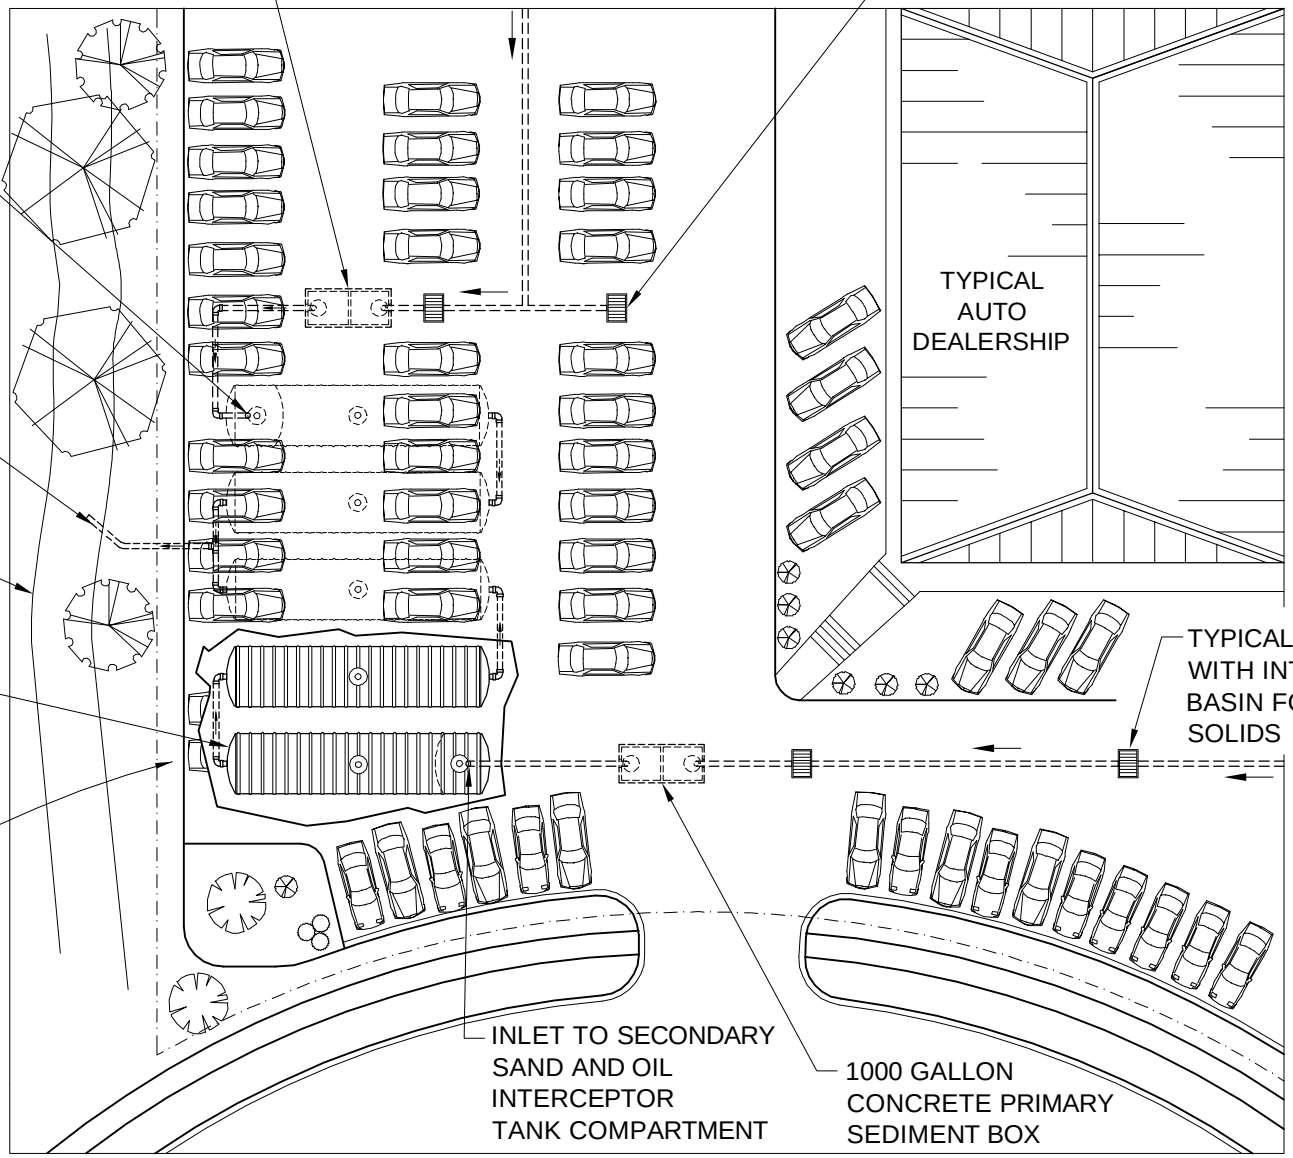

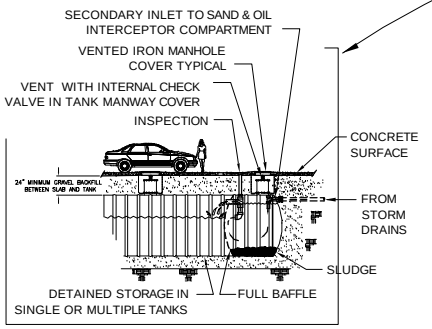

Click to View Enlargement of this area

NOT TO SCALE, FOR ILLUSTRATION ONLY

Darco Inc.
All Rights Reserved
Revision 6/15/10